# DXing with Digital Modes

Utah Digital Communications Conference February 2, 2019

John Mitton (KK7L)



### Why Chase DX

Make life-long friends in far away places

- Earn awards
  - DXCC DX Century Club
  - WAC Worked all Continents
  - WAZ Worked all Zones



- Hone skills in station/antenna design, operating practices
- Challenge of contacting & confirming rare locations
- 2019 is bottom of solar minimum
   Weak signal digital modes to the rescue!

### DX & Digital Modes


- CW: the original weak signal digital mode!
  - Occupies only 150 Hz
  - Very fast QSOs = more stations work the DX
  - Remains a mainstay DX & contesting mode
- RTTY: the original keyboard digital mode
  - DXpeditions continue to offer this mode
  - Fast QSO rates, sometimes inaccurate decoding



- By far the most popular HF digital mode today
- Slow QSO rates: up to 60 seconds each
  - New Fox/Hound DXpedition mode speeds this up

EME (moon bounce) modes, satellites on VHF







#### Technician Class? Get Your Feet Wet!

- CW & digital modes allowed on 10 meters (200 watts)
- Frequent daytime cross-equatorial band openings:
  - Central America & Caribbean
  - South America

#### 10 Meters

Novice and Technician classes:

28.000-28.300 MHz: CW, RTTY/Data--Maximum power 200 watts PEP 28.300-28.500 MHz: CW, Phone--Maximum power 200 watts PEP

- Learn CW ©
  - CW segments on most bands (200 watts)
  - DXpeditions often "listen up" into this allocation
  - Free CW training: online, on-air, & the Utah DX Association

# But Isn't This Required for DXing?



## My Antenna: 24' Flagpole Vertical



Zero to DXCC (100 entities confirmed) in just 152 days Accomplished it "barefoot" (100 watts), mostly CW & digital No issues with HOA restrictions

#### **Antenna Considerations**

- The most important component!
- From simple wire diploes on up
- Bigger and higher is (usually) better
- Small and low can be very effective however
- Resonant SWR provides greatest efficiency
- External tuner generally required for > 3:1 SWR
- Digital modes have changed the game for "little pistols"

#### Stealth Antennas

- Many HOA-friendly multi-band resonant options:
  - End-fed
  - Off-center-fed (OCF)
  - Dipole
  - Vertical
  - Loop
- Directional is ideal:
  - Low-profile SteppIR "Urban Beam"
  - Other stealthy directional antennas





### Transceivers & Digital Devices

- Any HF rig with "data" or "ACC" socket will do
- PC soundcard interface:
  - Keys rig (PTT)
  - Modulates TX & RX
  - Sets delay (if needed)
  - Sets TX & RX levels
- Rigs with internal sound cards are ideal:
  - Most all newer rigs have this
  - USB cable all that is needed

ACC(1)	PIN	PIN NAME	DESCRIPTION	SPECIFICATIONS
	1	CWK	CW and FSK keying input.	Input level: Less than 0.6 V for transmit.
	2	GND	Connects to ground.	Connected in parallel with ACC(2) pin 2.
	3	SEND	Input/output pin. Goes to ground when transmitting. When grounded, transmits.	Ground level: -0.5 to 0.8 V Input current: Less than 20 mA Connected in parallel with ACC(2) pin 3.
	4	MOD	Modulator input. Usable when pin 3 is grounded.	Input impedance: 10 kΩ Input level: Approx. 100 mV rms
	5	AF	AF detector output. Fixed, regardless of the [AF] position.	Output impedance: 4.7 kΩ Output level: 100–300 mV rms
Rear panel	6	SCAN	Starts scan when grounded.	Scan operation: Less than 0.6 V
view	7	13.6 V	13.6 V output when power is ON.	Output current: Max. 1 A Connected in parallel with ACC(2) pin 7.
	8	ALC	ALC voltage input.	Control voltage: $-3$ to 0 V Input impedance: More than 10 k $\Omega$ Connected in parallel with ACC(2) pin 5.






#### Software

- WSJT-X (free)
  - Foundational: K1JT's team develops this open source code set
  - Provides in addition to popular FT-8 mode:
    - WSPR weak signal propagation reporting
    - Modes for EME (moonbounce), meteor scatter
- JT-Alert (free, donations accepted)
  - Alerts you to missing DXCC, states, grids when stations are on air
- JTDX (free)
  - Derivative of WSJT-X. Intuitive and very popular with DXers!
- Ham Radio Deluxe (\$100)
  - Integrated software for logging, rig control, digital modes, satellites
- JS8Call (free)
  - FT8 derivative: keyboard chat for personalized QSO experience
- Fldigi (free)
  - Multi-mode program for RTTY, PSK and other traditional modes

#### Common Setup Mistakes

- PC's "speaker" & "mic" confusion with rig's TX & RX ports
- Windows / Mac system sounds going out on TX
- Inaccurate computer clock (check time.is & use Meinberg NTP app)
- Over-modulation

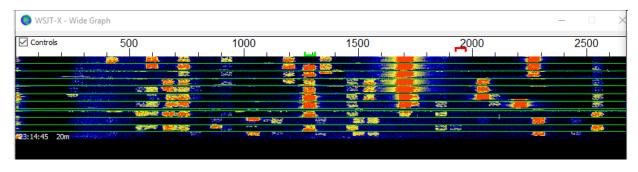



- Failure to check the "Hold TX Freq" box (best not to TX on your contact's same freq.)
- RF in the shack: shield & ferrite everything!




### **WSJT-X Software**

On-screen demonstration

### Online Tools: Propagation

- Know when propagation favors your location to the DX (especially during DXpeditions)
- Many free and low-cost prediction tools are available
  - www.voacap.com
  - www.solarham.net
  - www.k6tu.net

Become familiar with your "Grey Line" opportunities!

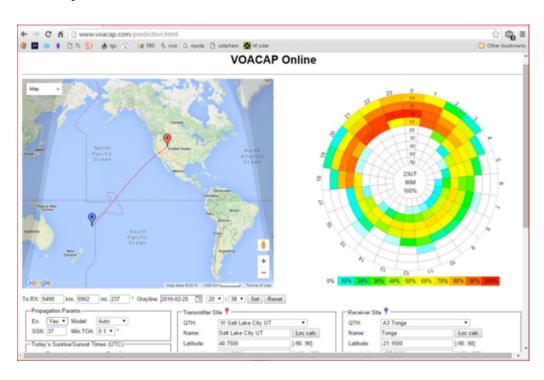

### Online Tools: DX Spotting Clusters

- The most satisfying contacts are those you make by simply turning the VFO & listening, or by calling CQ.
- Otherwise, many online tools are available to spot the DX
  - My favorite is dxheat.com
    - provides filters by mode, band, continent of both spotter & spotted

DX de	Freq	DX	Comments	итс
KG8V	14 256,7	✓ YV5NI	correct call	20:52
K3LUE	21 074,0	PY6MY	FT8	20:51
K3LUE	21 074,0	PY6MY	RTTY	20:51
W3LPL	7 018,8	FY5KE	Heard in VA	20:48
N4CFC	14 074,0	CU7AA		20:48
K5FNQ	24 915,0	<b>≅</b> E51BQ	FT8 workable from S. Louisiana	20:47
KI5AXG	14 256,7	V5ENI	Thanks 4 qso	20:47
VA2RF	3 763,0	ON4MCL	CQtest good signal here	20:46
N6ED	24 915,0	<b>≅</b> E51BQ	ft8 tnx	20:46
WK1W	14 175,0	LX2JJ	59+20 Mane USA great audio	20:45


Many logging software packages incorporate the spotting clusters

Don't completely rely on spots!
Call signs can be inaccurate

Spotting yourself is bad etiquette

#### Online Tools: QRZ.com

- Largest online database of worldwide ham calls
- Create your own page for contacts to learn about you

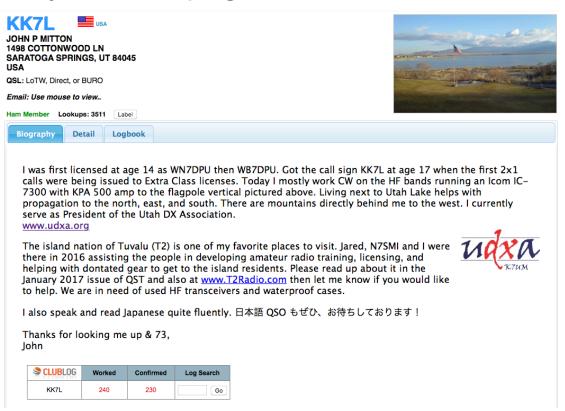

#### Online Tools: ARRL Logbook of the World

- Electronic QSL system
- Saves QSL print & mailing costs
- 15 year history
- Matches logs of 112,000 users
- Over 1 billion QSO records
- Free for ARRL members & DX
- Simplifies award submissions
  - DXCC
  - Worked all states
  - Worked all zones


DXCC Award	New LoTW QSLs	LoTW QSLs in Process	DXCC Credits Awarded	Total (All)	Total (Current)
Mixed *	11	0	214	225	225
<u>CW</u> *	10	0	198	208	208
<u>Phone</u>	2	0	48	50	50
<u>Digital</u>	4	0	22	26	26
<u>160M</u>	0	0	5	5	5
<u>80M</u>	1	0	18	19	19
<u>40M</u>	9	0	62	71	71
<u>30M</u>	9	0	70	79	79
<u>20M</u>	7	0	81	88	88
<u>17M</u>	3	0	46	49	49
<u>15M</u>	1	0	62	63	63
<u>12M</u>	2	0	14	16	16
<u>10M</u>	0	0	13	13	13
Challenge	32	0	371		403



### Online Tools: Clublog.org

- Wonderful free online toolkit by G7VJR for DXers
- Organizes your logs, tracking:
  - DXCC & Zones left to work
  - QSLs you need to confirm
- Searchable logs

CLUBLOG	Worked	Confirmed	Log Search	
KK7L	213	209		Go
DX Call	Date	Band	Mode	Entity
RM2D	2017-06-11	20M	cw	EUROPEAN RUSSIA
SP3A	2017-06-11	20M	CW	POLAND
RA3DOL	2017-06-11	20M	cw	EUROPEAN RUSSIA
EW7LO	2017-06-11	20M	CW	BELARUS
JA1CG	2017-05-04	20M	Phone	JAPAN
LZ2RS	2017-05-04	20M	CW	BULGARIA
KH6/KU1CW	2017-05-04	20M	CW	HAWAII
ZP6CW	2017-05-03	30M	cw	PARAGUAY
RI1ANC	2017-05-02	30M	cw	ANTARCTICA
ZL2MYT	2017-05-02	20M	cw	NEW ZEALAND

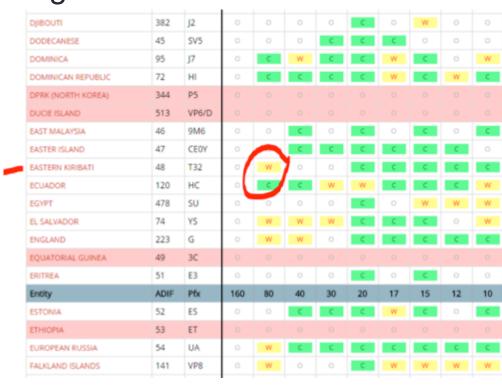

#### The Art of QSLing

Logbook of The World

#### OQRS

- Online QSL Request Service
  - Clublog & Paypal

#### Paper QSLs

- Nested SASE envelopes
- Foreign postage services
- International Reply Coupons
- ARRL bureau service



#### Resources

- Utah DX Association
  - www.UDXA.org
  - Meets 3<sup>rd</sup> Wednesdays in Murray from 7:00 pm
     SelectHealth Building just west of 5300 S freeway exit
- The New DX'ers Handbook by Utah's very own K7UA <u>http://www.K7UA.com</u> <u>http://tinyurl.com/dxhandbook</u>
- FT8 Operating Guide by ZL2IFB
   <a href="http://www.g4ifb.com/FT8\_Hinson\_tips\_for\_HF\_DXers.pdf">http://www.g4ifb.com/FT8\_Hinson\_tips\_for\_HF\_DXers.pdf</a>